

Installation instruction

一、Statement of Use


1. Please read all instructions before installation and carefully read installation precautions;
2. The lamp is suitable for indoor dry places, can't be installed in a humid environment;
3. Make sure the power supply is cut off before installation and maintenance, to avoid the risk of electric shock.
4. PC cover and PC embossed cover need to tear off the surface protective film before installation;
5. Please keep this Instruction properly for future reference.

二、Luminaire description


1. According to the different models, this lamp has different lengths and AC220V, DC24V, constant current three power access modes, please select the slot size and match the power supply according to the specific model and installation mode.
2. The main materials and usage of lamps: profiles, light source plate, PC cover, PC embossed cover + diffusion plate (first install diffusion plate, diffusion plate frosted surface outward; The concave and convex surface of the prism plate faces outward, the smooth surface faces inward), the end cover, the open-mounted splicing accessories, the hoisting splicing accessories, the tin foil and the leakproof curing adhesive (used in the splicing of the lamps).

三、Installation instructions

(一) Splicing mode

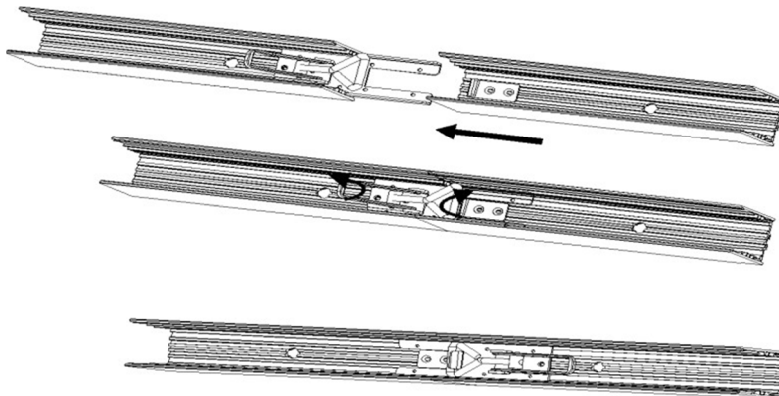


(二) Mask mounting mode

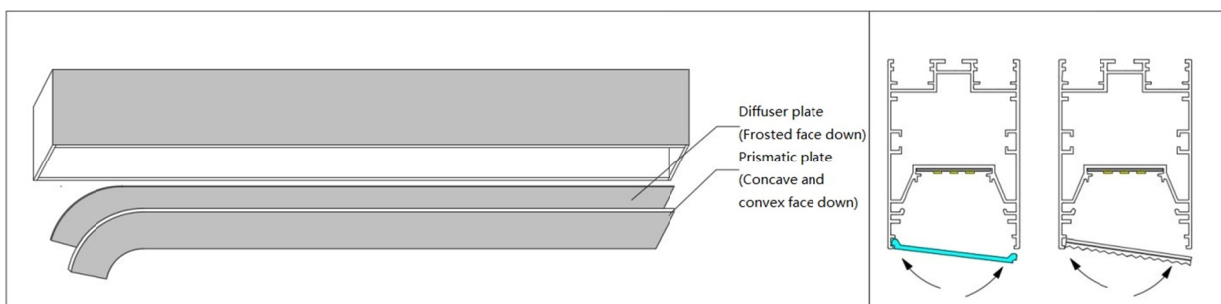


(三) Luminaire type


1. Ceiling type



2. Chandelier type

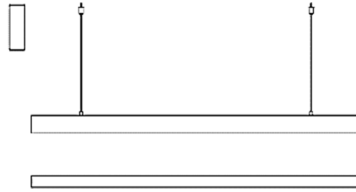


3. Recessed type

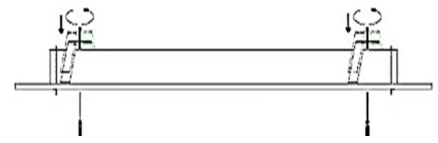

Fix it, do not lock it completely!


(四) Installation mode

1. Ceiling mounting


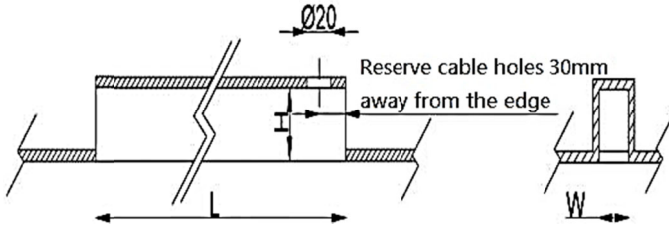


Slot length L= luminaire length +5mm
Slot width W= luminaire width +5mm
Slot depth H= luminaire height

Disjointed

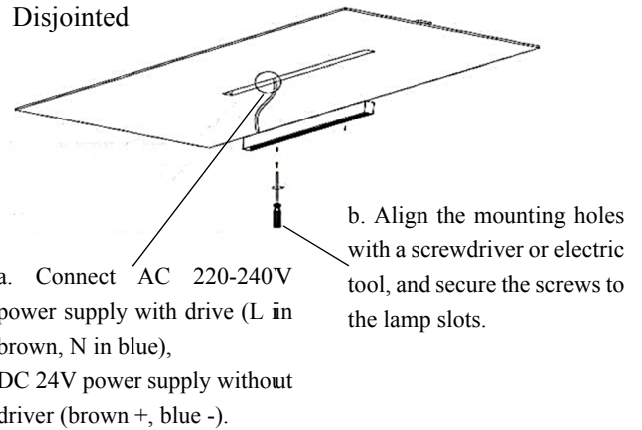


Splice

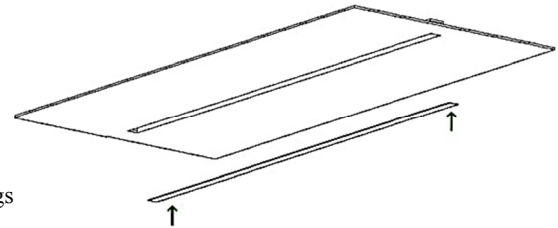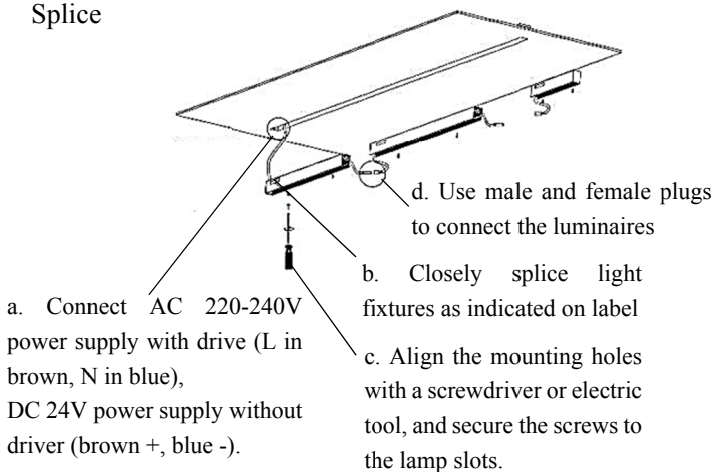


After the lamp is fixed, light up to confirm the installation, and carefully buckle the PC lampshade (in order to avoid the gap caused by the splicing error, the equipped lampshade will be 1-2mm longer than the rated length, and the excess part should be cut off to achieve no light leakage effect).


2. Chandelier mounting

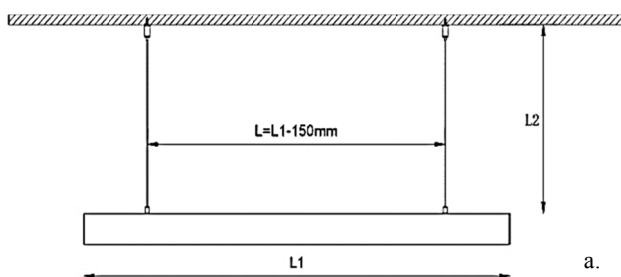

Green: Ground
Blue: N
White: Overlight L
Transparent: Downlight L

Splice

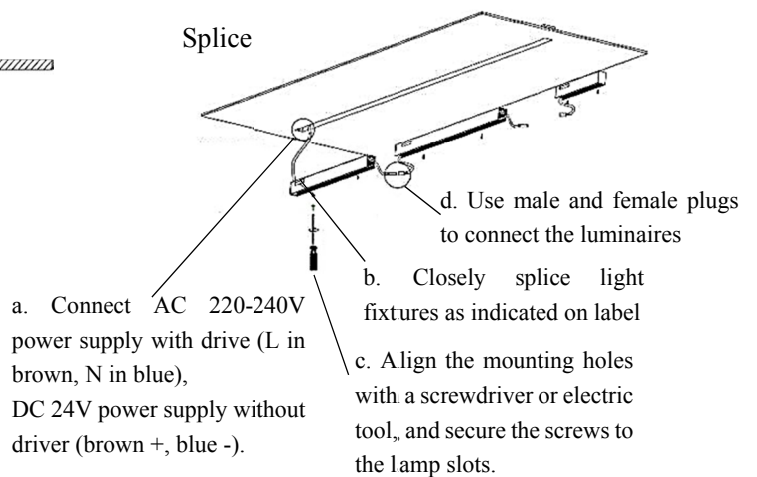

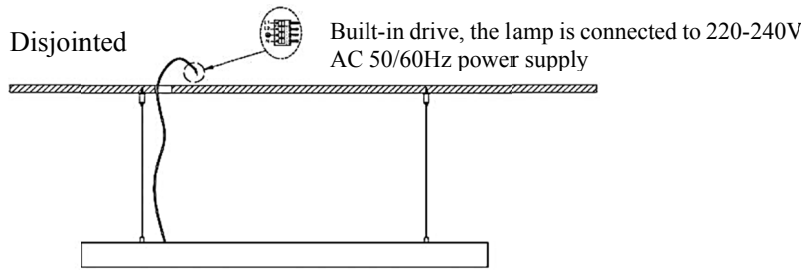


3. Recessed mounting

How to use the installation auxiliary parts:

- a. Clamp the installation auxiliary parts to the profile.





- b. First put one end of the lamp body into the ceiling, and then install the other end, paying attention to the size of the opening in the ceiling.

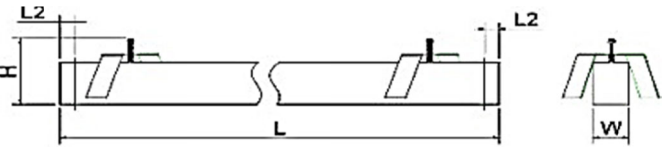



Opening size: Length $(L+5\text{mm})$ *Width $(W+5\text{mm})$ *Height $(h+50\text{mm})$
 $L2 \leq 20\text{mm}$

- c. Install light fixtures in the ceiling.

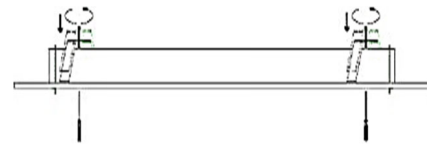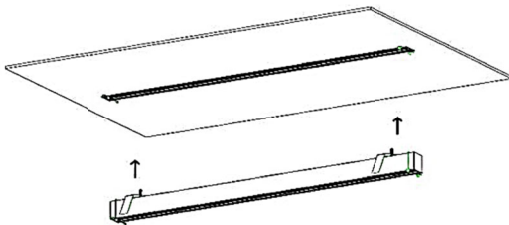

Fix it, do not lock it completely!

- d. Install PC cover or prismatic plate (please refer to: Mask mounting mode).

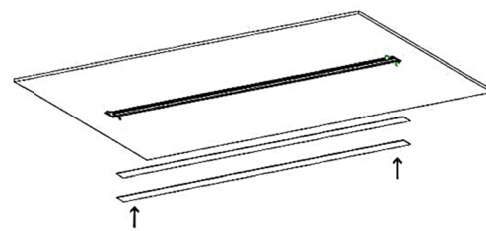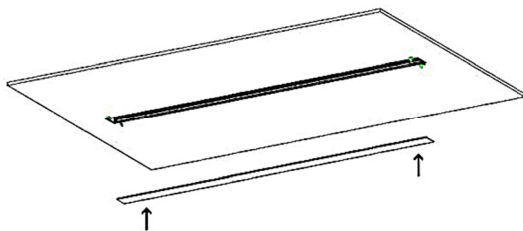

- e. Remove the installation auxiliary parts.

