Flood Luminaires




PROJECT:			TYPE:	

Product Image



Line Drawing



Product Description

SHINE PRO series is a professional LED floodlight designed by WAC for high-end outdoor lighting venues; Carefully designed with a unique appearance and a full glass surface design, it is simple and elegant, fashionable and beautiful, more suitable for current and future architectural trends. The lighting fixtures are equipped with W-Module modular design; Equipped with a breathing valve, it can effectively balance the internal and external air pressure to prevent condensation water; Fully integrating the principles of aerodynamics, creating the optimal heat dissipation structure, enhancing the heat dissipation performance of lighting fixtures, and extending the service life of LED lighting fixtures; Can precisely adjust the irradiation angle while designing a thoughtful angle locking structure to lock the projection direction; The SHINE PRO series lamps come in various sizes, angles, and power options to meet different lighting application solutions.

Product Features

 Body Material: 	Aluminum alloy die-casting
• Optical System:	Lens+ W-Module
• Finish:	Static electricity powder coating
 Adjustable Angle: 	+90/-30° in vertical direction
• Accessories:	As attached
• Certification:	CCC
• IP Rating:	IP65
• Insulation Level:	Class I
• Operating Temperature:	-20°C~50°C

Product Specifications

• LED Type:	HP LED
• LED Power:	200W(Max)
• Sourse Lm:	RGBW 3000K 10470lm ;RGBW 4000K
	10038lm; RGBW 6000K 10038lm
• LED Lifetime:	>50000h-L70 /B10-Ta25°C(LM-80/TM-21)
• CCT/CRI:	3000K/ 4000K/6000K
• SDCM:	5SDCM
• Input:	220V/AC 50/60Hz
• Dimming:	DAX512
• Net Weight:	26.5KG without packing

Order Model

Model	Power (W)	LEDs (quantit	Max Lumens cy) (Lm)	Con	trol Systems	Be	eam	CCT	Finish
					DMV512 Dimmin a	1	16°	F30 RGBW(3000K)	
EF3SI-200	200 (Max)	32	8647	ML	DMX512 Dimming 220V AC Power Supply	2	25°	F40 RGBW(4000K)	BK Black
						3	35°	F60 RGBW(6000K)	

Example: EF3SI-200ML-1F30BK

WAC Lighting www.waclighting.com (US) www.waclighting.com.cn (China) Headquarters 44 Harbor Park Drive • Port Washington, NY Phone (516) 515.5000 • Fax (516) 515.5050 WAC Lighting(Shanghai) 14,Lane 299, Bi Sheng Road, Shanghai 201204,China Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

Flood Luminaires




PROJECT:	TYPE:	

Accessories

ITEM	Abbreviate	PIC	Model
Wall Washer Visor	WW1		EF2SI-WW1-BK
Wall Washer Visor	WW2		EF2SI-WW2-BK
Wall Washer Visor	WW3		EF2SI-WW3-BK

LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

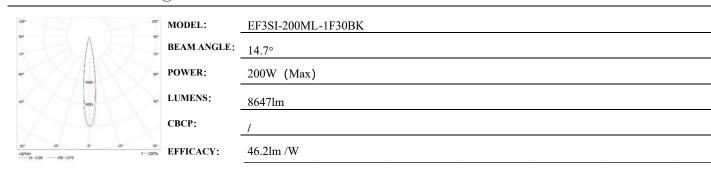

Flood Luminaires




PROJECT:	TYPE:	
	'	

Product Image



Line Drawing



Product Description

SHINE PRO series is a professional LED floodlight designed by WAC for high-end outdoor lighting venues; Carefully designed with a unique appearance and a full glass surface design, it is simple and elegant, fashionable and beautiful, more suitable for current and future architectural trends. The lighting fixtures are equipped with W-Module modular design; Equipped with a breathing valve, it can effectively balance the internal and external air pressure to prevent condensation water; Fully integrating the principles of aerodynamics, creating the optimal heat dissipation structure, enhancing the heat dissipation performance of lighting fixtures, and extending the service life of LED lighting fixtures; Can precisely adjust the irradiation angle while designing a thoughtful angle locking structure to lock the projection direction; The SHINE PRO series lamps come in various sizes, angles, and power options to meet different lighting application solutions.

Product Features

Body Material:	Aluminum alloy die-casting
• Optical System:	Lens+ W-Module
• Finish:	Static electricity powder coating
 Adjustable Angle: 	+90/-30° in vertical direction
• Accessories:	As attached
• Certification:	CCC
• IP Rating:	IP65
• Insulation Level:	Class I
• Operating Temperature:	-20°C~50°C

Product Specifications

• Net Weight:

• LED Type:	HP LED
• LED Power:	300W(Max)
• Sourse Lm:	RGBW 3000K 15706lm ;RGBW 4000K
	15273lm; RGBW 6000K 15273lm
• LED Lifetime:	>50000h-L70 /B10-Ta25°C(LM-80/TM-21)
• CCT/CRI:	3000K/ 4000K/6000K
• SDCM:	5SDCM
• Input:	220V/AC 50/60Hz
• Dimming:	DAX512

40.5KG without packing

Order Model

Model	Power (W)	LEDs (quantity)	Max Lumen: (Lm)	Control	Systems	Ве	eam	CCT	Finish
					DMX512 Dimming	1	16°	F30 RGBW(3000K)	
EF3LI-300	300 (Max)	48	12431	ML	220V AC Power	2	:25°	F40 RGBW(4000K)	BK Black
					Supply	3	35°	F60 RGBW(6000K)	

Example: EF3LI-300ML-1F30BK

WAC Lighting Headquarters WAC Lighting(Shanghai)
www.waclighting.com (US) 44 Harbor Park Drive • Port Washington, NY 14,Lane 299, Bi Sheng Road, Shanghai 201204,China
www.waclighting.com.cn (China) Phone (516) 515.5000 • Fax (516) 515.5050 Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

Flood Luminaires


11	/ ^	
V		1

_		
PROJECT:	TYPE:	
	'	

Accessories

ITEM	Abbreviate	PIC	Model
Wall Washer Visor	WW1	V	EF2LI-WW1-BK
Wall Washer Visor	WW2		EF2LI-WW2-BK
Wall Washer Visor	WW3		EF2LI-WW3-BK

LIGHT DISTRIBUTION@3000K LUMINAIRE DATA



MODEL: EF3LI-300ML-1F30BK

BEAM ANGLE:

POWER:

CBCP:

14.8°

300W (Max)

12431lm

42.98lm /W