

# LEDME - MODEL: WL300

## Step And Wall Luminaires




PROJECT:

TYPE:

### Product Image



### Line Drawing

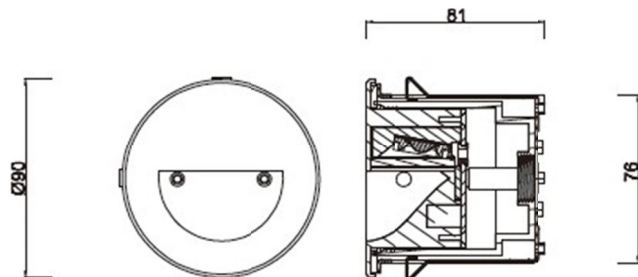

### Product Description

Designed to accentuate the aesthetics of the building, the LEDme<sup>®</sup> luminaires are designed to blend seamlessly into the wall. Efficient energy savings and optimized light output increase the safety and style of the staircase, maintaining minimal glare on the walls and walkways. IP66 enables both indoor and outdoor lighting solutions in wet locations. 220V/ AC direct wiring available; Available in white.

### Product Features

- Body Material: Aluminum alloy die-casting
- Optical System: /
- Finish: Static electricity powder coating
- Adjustable Angle: /
- Accessories: /
- Certification: CCC
- IP Rating: IP66
- Insulation Level: Class I
- Operating Temperature: -20°C~50°C

### Product Specifications

- Opening size:  $\Phi 82\text{mm}$
- LED Type: SMD
- Power: 3.22W
- Source Lm: 2700K 180lm/3000K 190lm/4000K 200lm
- LED Lifetime: >40000h-L70 / B10-Ta25°C(LM-80 / TM-21)
- CCT/CRI: 2700K,Ra80;3000K,Ra80; 4000K,Ra80
- SDCM: 3 SDCM
- Input: 220V/AC, 50 / 60Hz
- Dimming: ON-OFF
- Net Weight: 0.39Kg without packing

### Order Model

Model	Power (W)	Max Lumens (Lm)	Control Systems	CCT	Finish
WL300	LD05 3.9W	74	E ON-OFF 220V/AC Power Supply	27 2700K 30 3000K 40 4000K	WT White Coat BK Black Coat BZ Bronze BN Brushed Nickel

Example: WL300-LD05E-30WT

# LEDME - MODEL: WL300

## Step And Wall Luminaires


# WAC

PROJECT:

TYPE:

### Accessory

### LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

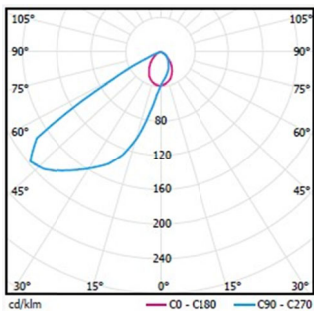

<b>MODEL:</b>	WL300-LD05E-30WT
<b>BEAMANGLE:</b>	/
<b>POWER:</b>	3.2W
<b>LUMENS:</b>	56lm
<b>CBCP:</b>	/
<b>EFFICACY:</b>	18 lm/W