

LIGNE II - MODEL: OP5512S


Linear Luminaires




PROJECT:

TYPE:

Product Image

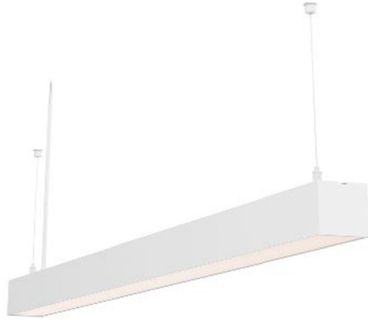

Line Drawing

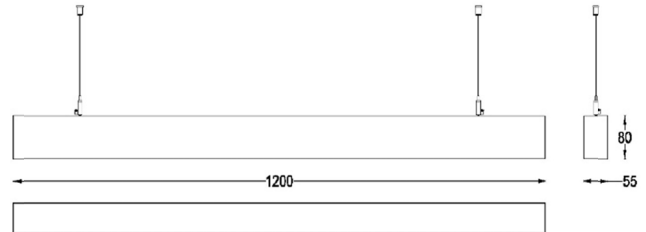

Product Description

LIGNE II cable light, the use of aluminum lamp body, simple and beautiful appearance, the use of LED light source, has good heat dissipation, high efficiency and energy saving, good anti-glare, can be splicing end to end, can be customized length. Suitable for commercial, office lighting applications.

Product Features

- Body Material: Aluminum alloy die-cast lamp body
- Optical System: Lens
- Finish: Electrostatic powder spraying
- Projection direction: /
- Accessories/Brackets: /
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C

Product Specifications

- Shielding Angle: /
- LED Type: SMD LED
- Source Lm: 4000K 4380lm
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/ SDCM: 3000K/ 4000K/5000K, Ra90
- Color tolerance of light source: 3 SDCM
- Input: 220V~240V AC / 50Hz
- Dimming: ON-OFF/0~10V (must be tested for compatibility with the project site system in advance)
- Net Weight: 2.87Kg without packing

Order Model

| Model | Length (mm) | Comment | Power (W) | Driver | Beam | CCT | Finish |
|-------|-------------|----------------------|-----------|-----------------------------|------------|----------|----------|
| OP55 | 12 1200 | S Single Directional | 35 35W | E ON-OFF D 0-10V Dimming | P (PC 面罩) | 30 3000K | WT White |
| | | | | | Y (PC 压花罩) | 40 4000K | |
| | | | | | | 50 5000K | |

Example: OP5512S-35E-P30WT

LIGNE II - MODEL: OP5512S

Linear Luminaires

WAC


PROJECT:

TYPE:

Attachment

| Model number | specificatio n | picture |
|------------------|---------------------|---|
| OP5512S-L | L-shaped splice |  |
| OP5512S-T | T-shaped splice |  |
| OP5512S-X | Cruciform splice |  |

LIGHT DISTRIBUTION@3000K LUMINAIRE DATA



| | |
|--------------------|--------------------------|
| MODEL: | <u>OP5512S-35E-P30WT</u> |
| BEAM ANGLE: | <u>/</u> |
| POWER: | <u>36W</u> |
| LUMENS: | <u>3060 lm</u> |
| CBCP: | <u>/</u> |
| EFFICACY: | <u>85 lm/W</u> |

LIGNE II - MODEL: OP5512S

Linear Luminaires




PROJECT:

TYPE:

Product Image



Line Drawing

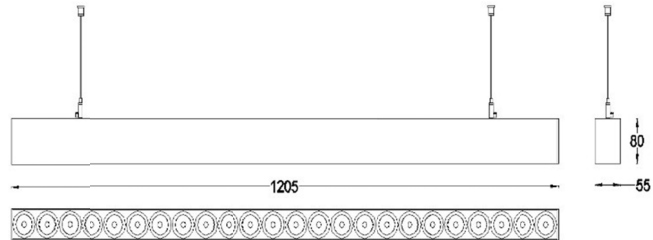

Product Description

LIGNE II cable light, the use of aluminum lamp body, simple and beautiful appearance, anti-glare grille, the use of LED light source, has good heat dissipation, high efficiency and energy saving, can be splicing end to end, can be customized length. Suitable for commercial, office lighting applications.

Product Features

- Body Material: Aluminum alloy die-cast lamp body
- Optical System: Lens + Anti-glare grille
- Finish: Electrostatic powder spraying
- Projection direction: /
- Accessories/Brackets: /
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C

Product Specifications

- Shielding Angle: 38°
- LED Type: SMD LED
- Source Lm: 4000K 4380lm
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/ SDCM: 3000K/ 4000K/5000K, Ra90
- Color tolerance of light source: 3 SDCM
- Input: 220V~240V AC / 50Hz
- Dimming: ON-OFF/0~10V (must be tested for compatibility with the project site system in advance)
- Net Weight: 3.05Kg without packing

Order Model

| Model | Length (mm) | Comment | Power (W) | Driver | Beam | CCT | Finish |
|-------|-------------|----------------------|-----------|-----------------------------|-------|----------|----------|
| OP55 | 12 1205 | S Single Directional | 35 35W | E ON-OFF D 0-10V Dimming | 2 24° | 30 3000K | WT White |
| | | | | | 3 36° | 40 4000K | |
| | | | | | 4 45° | 50 5000K | |

Example: OP5512S-35E-230WT

LIGNE II - MODEL: OP5512S


Linear Luminaires

WAC

PROJECT:

TYPE:

LIGHT DISTRIBUTION@3000K LUMINAIRE DATA



| | |
|--------------------|--------------------------|
| MODEL: | <u>OP5512S-35E-330WT</u> |
| BEAM ANGLE: | <u>/</u> |
| POWER: | <u>36W</u> |
| LUMENS: | <u>2646 lm</u> |
| CBCP: | <u>/</u> |
| EFFICACY: | <u>73.5 lm/W</u> |