

VOLTA TUNABLE- MODEL: DLT41



4" circular narrow edge embedded adjustable color temperature tube light


PROJECT:

TYPE:

Product Image



Line Drawing

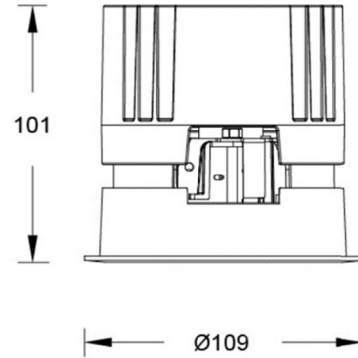

Product Description

VOLTA Tunable series LED circular narrow edge embedded adjustable color temperature tube lamp has a streamlined appearance and adopts precise lens and black mirror reflector design, ensuring the ultimate anti glare effect while emitting light. The light source cavity adopts a sealed design, which can minimize the impact of humid environments on its performance; Reflectors or optical accessories can also be freely disassembled and replaced, greatly improving on-site convenience, mainly suitable for hotels and commercial indoor places.

Product Features

- Body Material: Aluminum alloy die-casting lamp body
- Optical System: Lens+reflector
- Finish: Electrostatic powder coating
- Adjustable Angle: /
- Accessories: As attached
- Certification: CCC
- IP Rating: IP20 (Light source cavity IP44)
- Insulation Level: Class II
- Operating Temperature: -20°C~40°C

Product Specifications

- Cut-out: Ø100mm
- Ceiling Thickness: 1mm~20mm
- Shielding Angle: 30°
- LED Type: COB
- Source Lm: 2000lm
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI:: 2700K~6000K adjustable, CRI≥90
- Input: 220V AC / 50Hz
- Dimming: DALI(Must conduct compatibility testing with the project site system in advance)
- Net Weight: 0.6Kg without packing

Order Model

Model	Size	Trim	LED	Driver	Beam	CCT	Reflector	Finish
DLT	4	1	LM18	A DALI	1 18°	CC	B Black	WT White
Downlight	4"	Round Trim	COB 18W	N No Driver	2 28°	2700K~60	S Specular	BK Black
T series					3 38°	00K		
					5 50°	(Tunable)		

Example: DLT41-LM18A-2CCSWT

VOLTA TUNABLE- MODEL: DLT41





4" circular narrow edge embedded adjustable color temperature tube light

PROJECT:


TYPE:

Accessory


LENS-DLT41-BEL Striped glass lenses 	LENS-DLT41-HCL Borderless honeycomb grille 
---	--

Attention: At most one optical accessory can be added, and it is not included in the factory. It needs to be ordered separately.


LIGHT DISTRIBUTION@3000K LUMINAIRE DATA




MODEL:	<u>DLT41-LM18A-1CCSWT</u>
BEAM ANGLE:	<u>18°</u>
POWER:	<u>21W</u>
LUMENS:	<u>1349lm</u>
CBCP:	<u>9081cd</u>
EFFICACY:	<u>64lm/W</u>



MODEL:	<u>DLT41-LM18A-2CCSWT</u>
BEAM ANGLE:	<u>28°</u>
POWER:	<u>21W</u>
LUMENS:	<u>1384lm</u>
CBCP:	<u>6025cd</u>
EFFICACY:	<u>66lm/W</u>



MODEL:	<u>DLT41-LM18A-3CCSWT</u>
BEAM ANGLE:	<u>38°</u>
POWER:	<u>21W</u>
LUMENS:	<u>1421lm</u>
CBCP:	<u>2871cd</u>
EFFICACY:	<u>68lm/W</u>



MODEL:	<u>DLT41-LM18A-5CCSWT</u>
BEAM ANGLE:	<u>50°</u>
POWER:	<u>21W</u>
LUMENS:	<u>1184lm</u>
CBCP:	<u>1558cd</u>
EFFICACY:	<u>56lm/W</u>

VOLTA TUNABLE- MODEL: DLT51



5" circular narrow edge embedded adjustable color temperature tube light


PROJECT:

TYPE:

Product Image



Line Drawing

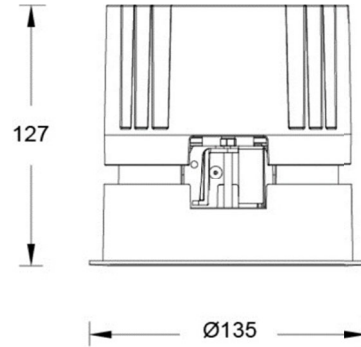

Product Description

VOLTA Tunable series LED circular narrow edge embedded adjustable color temperature tube lamp has a streamlined appearance and adopts precise lens and black mirror reflector design, ensuring the ultimate anti glare effect while emitting light. The light source cavity adopts a sealed design, which can minimize the impact of humid environments on its performance; Reflectors or optical accessories can also be freely disassembled and replaced, greatly improving on-site convenience, mainly suitable for hotels and commercial indoor places.

Product Features

- Body Material: Aluminum alloy die-casting lamp body
- Optical System: Lens+reflector
- Finish: Electrostatic powder coating
- Adjustable Angle: /
- Accessories: As attached
- Certification: CCC
- IP Rating: IP20 (Light source cavity IP44)
- Insulation Level: Class II
- Operating Temperature: -20°C~40°C

Product Specifications

- Cut-out: Ø125mm
- Ceiling Thickness: 1mm~25mm
- Shielding Angle: 30°
- LED Type: COB
- Source Lm: 2500lm
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K~6000K adjustable, CRI≥90
- Input: 220V AC / 50Hz
- Dimming: DALI(Must conduct compatibility testing with the project site system in advance)
- Net Weight: 1.1Kg without packing

Order Model

Model	Size	Trim	LED	Driver	Beam	CCT	Reflector	Finish
DLT	5	1	LM25	A DALI	1 18°	CC 2700K~6000K (Tunable)	B Black S Specular	WT White BK Black
Downlight	5"	Round Trim	COB 25W	N No Driver	2 28°			
T series					3 38°			
					5 50°			

Example: DLT51-LM25A-2CCSWT

WAC Lighting
www.waclighting.com (US)
www.waclighting.com.cn (China)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting Technology (Shanghai) Co, Ltd.
14,Lane 299, Bi Sheng Road,Shanghai 201204
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

VOLTA TUNABLE- MODEL: DLT51





5" circular narrow edge embedded adjustable color temperature tube light

PROJECT:


TYPE:

accessory


LENS-DLT51-BEL Striped glass lenses 	LENS-DLT51-HCL Borderless honeycomb grille 
---	--

Attention: At most one optical accessory can be added, and it is not included in the factory. It needs to be ordered separately


LIGHT DISTRIBUTION@3000K LUMINAIRE DATA




MODEL: DLT51-LM25A-1CCSWT
BEAM ANGLE: 18°
POWER: 28W
LUMENS: 2094lm
CBCP: 14632cd
EFFICACY: 75lm/W



MODEL: DLT51-LM25A-2CCSWT
BEAM ANGLE: 28°
POWER: 28W
LUMENS: 1967lm
CBCP: 8073cd
EFFICACY: 70lm/W



MODEL: DLT51-LM25A-3CCSWT
BEAM ANGLE: 38°
POWER: 28W
LUMENS: 2142lm
CBCP: 4668cd
EFFICACY: 77lm/W



MODEL: DLT51-LM25A-5CCSWT
BEAM ANGLE: 50°
POWER: 28W
LUMENS: 1830lm
CBCP: 2794cd
EFFICACY: 65lm/W

VOLTA TUNABLE- MODEL: DLT61



6" circular narrow edge embedded adjustable color temperature tube light


PROJECT:

TYPE:

Product Image



Line Drawing

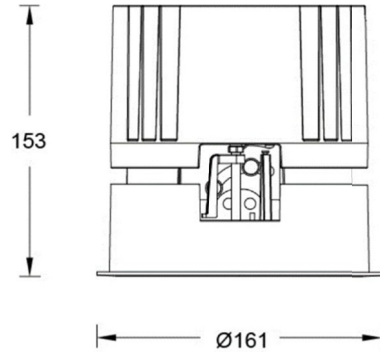

Product Description

VOLTA Tunable series LED circular narrow edge embedded adjustable color temperature tube lamp has a streamlined appearance and adopts precise lens and black mirror reflector design, ensuring the ultimate anti glare effect while emitting light. The light source cavity adopts a sealed design, which can minimize the impact of humid environments on its performance; Reflectors or optical accessories can also be freely disassembled and replaced, greatly improving on-site convenience, mainly suitable for hotels and commercial indoor places.

Product Features

- Body Material: Aluminum alloy die-casting lamp body
- Optical System: Lens+reflector
- Finish: Electrostatic powder coating
- Adjustable Angle: /
- Accessories: As attached
- Certification: CCC
- IP Rating: IP20 (Light source cavity IP44)
- Insulation Level: Class II
- Operating Temperature: -20°C~40°C

Product Specifications

- Cut-out: Ø150mm
- Ceiling Thickness: 1mm~30mm
- Shielding Angle: 30°
- LED Type: COB
- Source Lm: 4500lm
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K~6000K adjustable, CRI≥90
- Input: 220V AC / 50Hz
- Dimming: DALI(Must conduct compatibility testing with the project site system in advance)
- Net Weight: 1.7Kg without packing

Order Model

Model	Size	Trim	LED	Driver	Beam	CCT	Reflector	Finish
DLT Downlight T series	6 6"	1 Round Trim	LM43 COB 43W	A DALI N No Driver	1 18°	CC 2700K~6000K (Tunable)	B Black S Specular	WT White BK Black
					2 28°			
					3 38°			
					5 50°			

Example: DLT61-LM43A-2CCSWT

WAC Lighting
www.waclighting.com (US)
www.waclighting.com.cn (China)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting Technology (Shanghai) Co, Ltd.
14,Lane 299, Bi Sheng Road,Shanghai 201204
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

VOLTA TUNABLE- MODEL: DLT61





6" circular narrow edge embedded adjustable color temperature tube light

PROJECT:


TYPE:

accessory


LENS-DLT61-BEL Striped glass lenses 	LENS-DLT61-HCL Borderless honeycomb grille 
---	--

Attention: At most one optical accessory can be added, and it is not included in the factory. It needs to be ordered separately


LIGHT DISTRIBUTION@3000K LUMINAIRE DATA




MODEL: DLT61-LM43A-1CCSWT
BEAM ANGLE: 18°
POWER: 47W
LUMENS: 3254lm
CBCP: 20859cd
EFFICACY: 65lm/W



MODEL: DLT61-LM43A-2CCSWT
BEAM ANGLE: 28°
POWER: 47W
LUMENS: 3271lm
CBCP: 14257cd
EFFICACY: 70lm/W



MODEL: DLT61-LM43A-3CCSWT
BEAM ANGLE: 38°
POWER: 47W
LUMENS: 3367lm
CBCP: 7111cd
EFFICACY: 72lm/W



MODEL: DLT61-LM43A-5CCSWT
BEAM ANGLE: 50°
POWER: 47W
LUMENS: 3249lm
CBCP: 4052cd
EFFICACY: 69lm/W