

SILO WALL WASHER - MODEL: TL15WLM

W Track Luminaires

WAC


PROJECT :

TYPE :

Product Image



Line Drawing

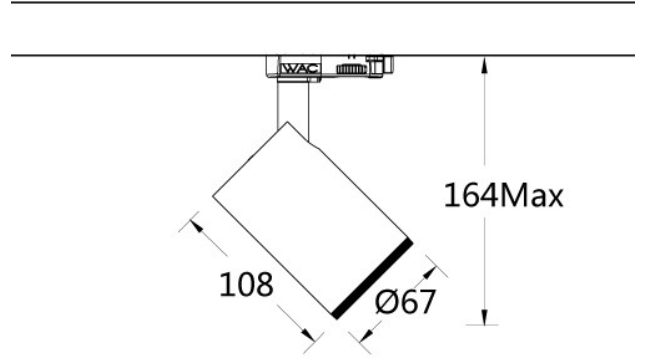

Product Description

The SILO Wall Washer (WW) series LED track spotlights are suitable for the W three circuit track system, with a delicate design and no visible heat sink. The lamp body is made of die cast aluminum, with built-in flicker free driving appliances and a COB luminous module, providing a variety of standard color temperature options. They have excellent wall washing lighting and excellent color rendering performance, and are widely used in museums, art galleries, commercial spaces, hotels, retail and other places.

Product Features

- Body Material : Aluminum alloy die-casting
- Optical System: : Doublet lens
- Finish : Static electricity powder coating
- Adjustable Angle: horizontal 0°~355° ; vertical 0~90°
- Accessories : light shield
- Certification : CCC
- IP Rating : IP20
- Insulation Level : Class I
- Operating Temperature : -20°C~40°C
- Net Weight : 0.5Kg without packing

Product Specifications

- LED type : COB
- LED power : 6W or 12W
- Source LM : 2700K : 760lm (6W) / 1260lm (12W)
3000K : 800lm (6W) / 1330lm (12W)
4000K : 850lm (6W) / 1410lm (12W)
5000K : 860lm (6W) / 1420lm (12W)
- LED lifetime : >50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- CCT/CRI : 2700K / 3000K / 4000K / 5000K , >Ra90
- SDCM : 3 SDCM
- Input : 220V~240V AC / 50Hz
- Dimming : built in dimming (dimming Range 10%~100%) 、 0-10V dimming (must undergo compatibility testing with the project site)

Order model

Model	LED	Dimming	Beam	CRI	CCT	Finish
TL15W SILO WW	LM06 COB 6W	O On-board	W Washer	9 90	27 2700K	WT White BK Black
	LM12 COB 12W	D 0-10V			30 3000K	
					40 4000K	
					50 5000K	
TL15W	LM12	O	W	9	30	WT

Example : TL15WLM12-O-W930WT

SILO WALL WASHER - MODEL: TL15WLM

W Track Luminaires

WAC

PROJECT :


TYPE :

Accessory


Four leaf shading board
TL-21-BD-SW



LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

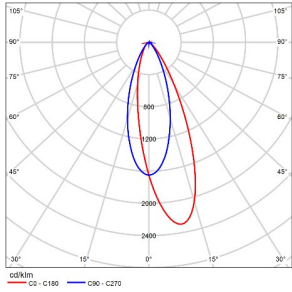

MODEL : TL15WLM06-O-W930
BEAM ANGLE : WALL WASHING
POWER : 8W
LUMENS : 519lm
CBCP : /
EFFICACY : 65lm/W

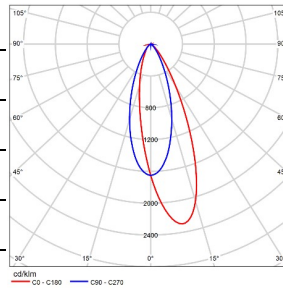

MODEL : TL15WLM12-O-W930
BEAM ANGLE : WALL WASHING
POWER : 15W
LUMENS : 822lm
CBCP : /
EFFICACY : 55lm/W

SILO WALL WASHER - MODEL: TL16WLM

W Track Luminaires




PROJECT :

TYPE :

Product Image



Line Drawing

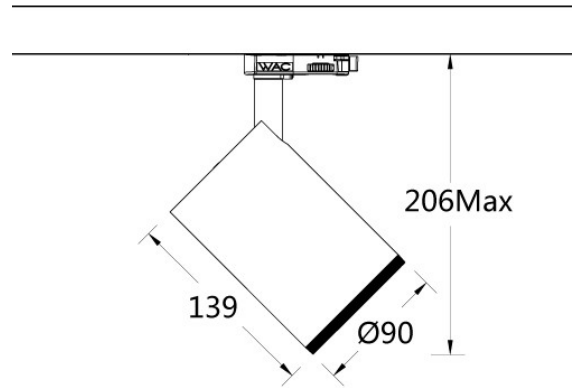

Product Description

The SILO Wall Washer (WW) series LED track spotlights are suitable for the W three circuit track system, with a delicate design and no visible heat sink. The lamp body is made of die cast aluminum, with built-in flicker free driving appliances and a COB luminous module, providing a variety of standard color temperature options. They have excellent wall washing lighting and excellent color rendering performance, and are widely used in museums, art galleries, commercial spaces, hotels, retail and other places.

Product Features

- Body Material : Aluminum alloy die-casting
- Optical System : doublet lens
- Finish : static electricity powder coating
- Adjustable Angle: level 0-355° ; vertical 0-90°
- Accessories : light shield
- Certification : CCC
- IP Rating : IP20
- Insulation Level : Class I
- Operating Temperature : -20°C~40°C
- Net Weight : 1.0Kg without packing

Product Specifications

- LED type : COB
- Led power : 18W or 26W
- source Lm : 2700K : 2030lm (18W) / 2710lm (26W)
3000K : 2120lm (18W) / 2830lm (26W)
4000K : 2230lm (18W) / 2970lm (26W)
5000K : 2330lm (18W) / 3100lm (26W)
- Led Lifetime : >50000h-L70/B10-Ta25°C(LM-80/TM-21)
- CCT/CRI : 2700K / 3000K / 4000K / 5000K , >Ra90
- SDCM : 3 SDCM
- INPUT : 220V~240V AC / 50Hz
- Dimming : built in knob dimming (10%~100%) 、 DALI
1-10V dimming (compatibility testing must be conducted with the project site in advance)

Order model

Model	LED	Dimming	Beam	CRI	CCT	Finish
TL16W SILO WW	LM18 COB 18W LM26 COB 26W	O On-board D 0-10V A DALI	W Washer	9 90	27 2700K 30 3000K 40 4000K 50 5000K	WT White BK Black
TL16W	LM18	O	W	9	30	WT

Example : TL16WLM18-O-W930WT

SILO WALL WASHER - MODEL: TL17WLM

W Track Luminaires

WAC

PROJECT :


TYPE :

Accessory


Four leaf shading board
LENS-73-BD



LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

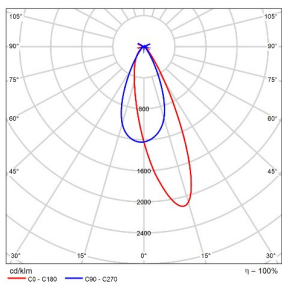

MODEL :	TL16WLM18-O-W930
BEAM ANGLE :	Wall washing
POWER :	21W
LUMENS :	1555lm
CBCP :	/
EFFICACY :	74lm/W

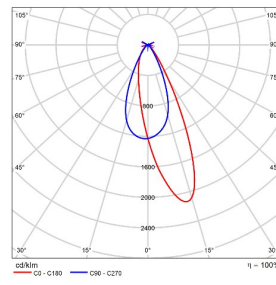

MODEL :	TL16WLM26-O-W930
BEAM ANGLE :	Wall washing
POWER :	30W
LUMENS :	2061lm
CBCP :	/
EFFICACY :	69lm/W

SILO WALL WASHER - MODEL: TL17WLM

W Track Luminaires




PROJECT :

TYPE :

Product Image



Line Drawing

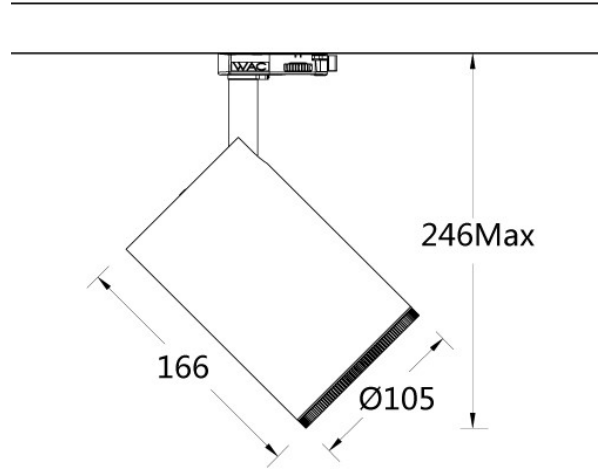

Product Description

The SILO Wall Washer (WW) series LED track spotlights are suitable for the W three circuit track system, with a delicate design and no visible heat sink. The lamp body is made of die cast aluminum, with built-in flicker free driving appliances and a COB luminous module, providing a variety of standard color temperature options. They have excellent wall washing lighting and excellent color rendering performance, and are widely used in museums, art galleries, commercial spaces, hotels, retail and other places.

Product Features

- Body Material : Aluminum alloy die-casting
- Optical System : Doublet lens
- Finish : Static electricity powder coating
- Adjustable Angle: level 0-355° vertical 0-90°
- Accessories : Light shield
- Certification : CCC
- IP Rating : IP20
- Insulation Level : Class I
- Operating Temperature : -20°C~40°C
- Net Weight : 1.4Kg without packing

Product Specifications

- LED Type : COB
- LED power : 34W
- Source Lm : 3390lm (2700K) / 3530lm (3000K)
3710lm (4000K) / 3880lm (5000K)
- LED Lifetime : >50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- CCT/CRI : 2700K / 3000K / 4000K / 5000K , >Ra90
- SDCM : 3 SDCM
- Input : 220V~240V AC / 50Hz
- Dimming : built in knob dimming (10%~100%) 、 DALI
1-10V dimming (compatibility testing must be conducted with the project site in advance)

Order model

Model	LED	Dimming	Beam	CRI	CCT	Finish
TL17W SILO WW	LM34 COB 34W	O On-board D 0-10V A DALI	W Washer	9 90	27 2700K 30 3000K 40 4000K 50 5000K	WT White BK Black
TL17W	LM34	O	W	9	30	WT

Example : TL17WLM34-O-W930WT

SILO WALL WASHER - MODEL: TL17WLM

W Track Luminaires

WAC

PROJECT :


TYPE :

Accessory

Four leaf shading board
TL-22-BD-SW



LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

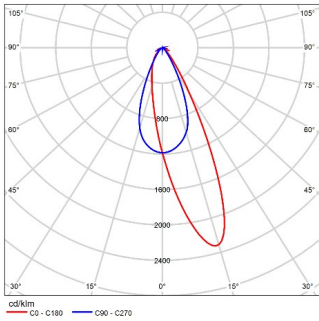

MODEL : TL17WLM34-O-W930

BEAM ANGLE : WALL WASHING

POWER : 38W

LUMENS: 2464lm

CBCP : /

EFFICACY : 65lm/W

WAC Lighting

www.waclighting.com (US)

www.waclighting.com.cn (China)

Headquarters

44 Harbor Park Drive • Port Washington, NY

Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)

14,Lane 299, Bi Sheng Road,Shanghai 201204

Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

WAC Lighting reserves the right to periodically design and update products.2024-01-25