

PALOMA PRO WALL WASHER (WW)

W Track Luminaires

PROJECT :


WAC

TYPE :

Product Image



Line Drawing

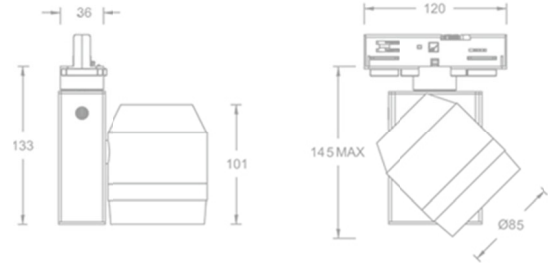

Product Description

VOLTA series LED round narrow-edge recessed angle downlights have a streamlined appearance and adopt precise lens and black mirror reflector designs to ensure that the light is emitted while still achieving the ultimate anti-glare effect. The light source cavity adopts a sealed design, which can minimize the impact of humid environment on its performance, and the reflector or optical accessories can be freely disassembled and replaced, which greatly improves on-site convenience and is mainly suitable for hotels and commercial indoor places.

Product Advantages

- LED light source, without red/ultraviolet rays
- Two color temperatures available
- Accurate wash wall with light distribution
- Projection in any direction: horizontal adjustment from 0° to 365°; vertical adjustment from -90° to 90°
- Optional Barn Door accessory available
- LED lifespan: 50,000 hours
- 2-year warranty
- IP20

Product Specifications


Model	CCT	CRI	Beam	LED Lumens	Sys Lumens
TL52CLD08-X-W930	3000K	≥Ra90	Wash	720lm	456lm
TL52CLD08-X-W940	4000K	≥Ra90	Wash	760lm	482lm

Note: "X" represents different dimming options.

Product Features

- Body Material: Aluminum alloy die-casting
- Driver: Input voltage: 220V~240VAC 50Hz, Electrical box located on the side of the lamp body.
- Dimming: Dimming knob (dimming range: 10% to 100%) or DALI dimming (advance compatibility testing with dimming system required)
- Light source: Using Lumileds LED with a power of 8W at 3000K / 4000K color temperature and a color rendering index of ≥Ra90.
- Finish: Static electricity powder coating Black (BK), White (WT), Platinum (PT)

Optical accessories

TL-520-BD	Four-leaf shutter	
-----------	-------------------	---

Order Model

Model	LED	Dimming	Beam	CRI	CCT	Color
TL52C PALOMA Pro WW	LD08 LED 08W	O On-boarding A DALI	W Wash	9 90	30 3000K 40 4000K	WT White
						BK Black
						PT Platinum
TL52C	LD08	O	W	9	30	WT

Example : TL52CLD08-O-W930WT

WAC Lighting
www.wacighting.com (US)
www.wacighting.com.cn (China)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)
14, Lane 299, Bi Sheng Road, Shanghai 201204, China
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

WAC Lighting reserves the right to periodically design and update products. 2024-01-29

PALOMA PRO WALL WASHER (WW)

W Track Luminaires

PROJECT :


WAC

TYPE :

Product Image



Line Drawing

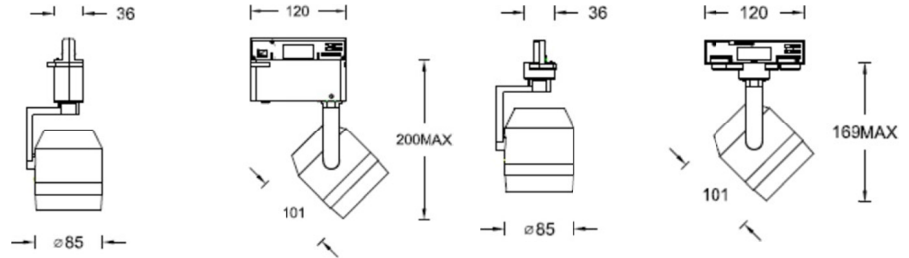

TL52SLD08-O

TL52SLD08-E

Product Description

VOLTA series LED round narrow-edge recessed angle downlights have a streamlined appearance and adopt precise lens and black mirror reflector designs to ensure that the light is emitted while still achieving the ultimate anti-glare effect. The light source cavity adopts a sealed design, which can minimize the impact of humid environment on its performance, and the reflector or optical accessories can be freely disassembled and replaced, which greatly improves on-site convenience and is mainly suitable for hotels and commercial indoor places.

Product Advantages

- LED light source, without red/ultraviolet rays
- Two color temperatures available
- Accurate wash wall with light distribution
- Projection in any direction: horizontal adjustment from 0° to 365°; vertical adjustment from -90° to 90°
- Optional Barn Door accessory available
- LED lifespan: 50,000 hours
- 2-year warranty
- IP20

Product Specifications

Model	CCT	CRI	Beam	LED Lumens	Sys Lumens
TL52SLD08-X-W930	3000K	≥Ra90	Wash	720lm	456lm
TL52SLD08-X-W940	4000K	≥Ra90	Wash	760lm	482lm

Note: "X" represents different dimming options.

Product Features

- Body Material: Aluminum alloy die-casting
- Driver: Input voltage: 220V~240VAC 50Hz, Electrical box located on the side of the lamp body.
- Dimming: Dimming knob (dimming range: 10% to 100%) or DALI dimming (advance compatibility testing with dimming system required)
- Light source: Using Lumileds LED with a power of 8W at 3000K / 4000K color temperature and a color rendering index of ≥Ra90.
- Finish: Static electricity powder coating Black (BK), White (WT), Platinum (PT)

Optical accessories

TL-520-BD	Four-leaf shutter	
-----------	-------------------	--

Order Model

Model	LED	Dimming	Beam	CRI	CCT	Color
TL52S PALOMA Pro WW	LD08 LED 08W	O On-boarding A DALI	W Wash	9 90	30 3000K 40 4000K	WT White
						BK Black
						PT Platinum
TL52S	LD08	O	W	9	30	WT

Example : TL52SLD08-O-W930WT

WAC Lighting
www.waclighting.com (US)
www.waclighting.com.cn (China)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)
14,Lane 299, Bi Sheng Road, Shanghai 201204,China
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

PALOMA PRO WALL WASHER (WW)

W Track Luminaires

PROJECT :


WAC

TYPE :

Light distribution



- D Distance from lamp to wall: 0.85m
- N Number of lamps: 2 pcs
- L Spacing between adjacent lamps: 1.08m
- H Wall height: 3.2m

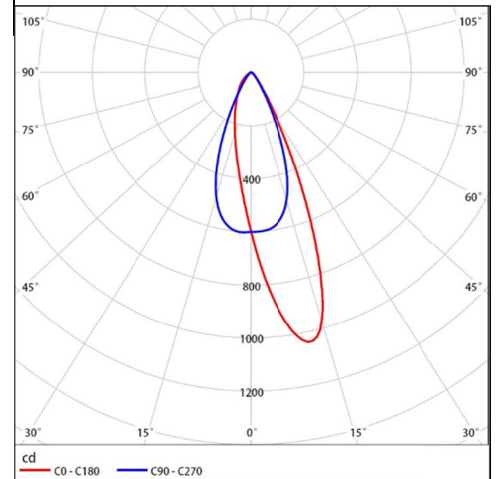

PALOMA PRO WALL WASHER (WW)

W Track Luminaires

PROJECT :


WAC

TYPE :

Product Image



Line Drawing

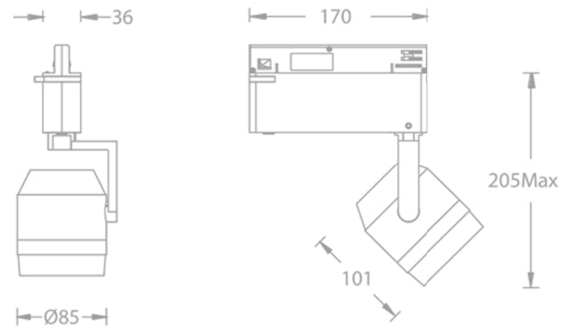

Product Description

VOLTA series LED round narrow-edge recessed angle downlights have a streamlined appearance and adopt precise lens and black mirror reflector designs to ensure that the light is emitted while still achieving the ultimate anti-glare effect. The light source cavity adopts a sealed design, which can minimize the impact of humid environment on its performance, and the reflector or optical accessories can be freely disassembled and replaced, which greatly improves on-site convenience and is mainly suitable for hotels and commercial indoor places.

Product Advantages

- LED light source, without red/ultraviolet rays
- Two color temperatures available
- Accurate wash wall with light distribution
- Projection in any direction: horizontal adjustment from 0° to 365°; vertical adjustment from -90° to 90°
- Optional Barn Door accessory available
- LED lifespan: 50,000 hours
- 2-year warranty
- IP20

Product Specifications


Model	CCT	CRI	Beam	LED Lumens	Sys Lumens
TL52SLD12-X-W930	3000K	≥Ra90	Wash	840lm	528lm
TL52SLD12-X-W940	4000K	≥Ra90	Wash	900lm	565lm

Note: "X" represents different dimming options.

Product Features

- Body Material: Aluminum alloy die-casting
- Driver: Input voltage: 220V~240VAC 50Hz, Electrical box located on the side of the lamp body.
- Dimming: Dimming knob (dimming range: 10% to 100%) or DALI dimming (advance compatibility testing with dimming system required)
- Light source: Using Lumileds LED with a power of 12W at 3000K / 4000K color temperature and a color rendering index of ≥Ra90.
- Finish: Static electricity powder coating Black (BK), White (WT), Platinum (PT)

Optical accessories

TL-520-BD	Four-leaf shutter	
-----------	-------------------	---

Order Model

Model	LED	Dimming	Beam	CRI	CCT	Color
TL52S PALOMA Pro WW	LD12 LED 12W	O On-boarding A DALI	W Wash	9 90	30 3000K 40 4000K	WT White
						BK Black
						PT Platinum
TL52S	LD12	O	W	9	30	WT

Example : TL52SLD12-O-W930WT

WAC Lighting
www.waclighting.com (US)
www.waclighting.com.cn (China)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)
14,Lane 299, Bi Sheng Road, Shanghai 201204,China
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

PALOMA PRO WALL WASHER (WW)

W Track Luminaires

PROJECT :


WAC

TYPE :

Product Image



Line Drawing

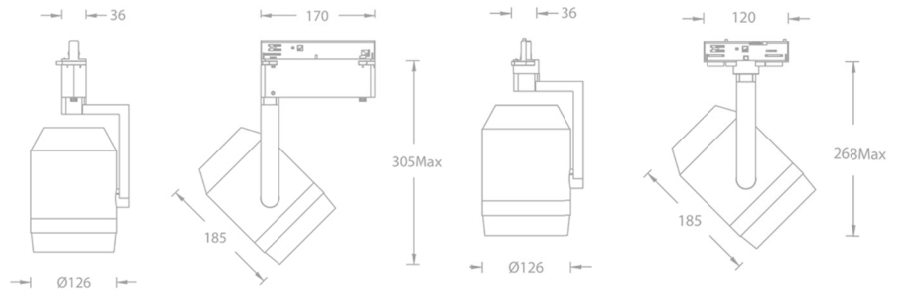

Product Description

VOLTA series LED round narrow-edge recessed angle downlights have a streamlined appearance and adopt precise lens and black mirror reflector designs to ensure that the light is emitted while still achieving the ultimate anti-glare effect. The light source cavity adopts a sealed design, which can minimize the impact of humid environment on its performance, and the reflector or optical accessories can be freely disassembled and replaced, which greatly improves on-site convenience and is mainly suitable for hotels and commercial indoor places.

TL54SLD18-O/A

TL54SLD18-E

Product Advantages

- LED light source, without red/ultraviolet rays
- Two color temperatures available
- Accurate wash wall with light distribution
- Projection in any direction: horizontal adjustment from 0° to 365°; vertical adjustment from -90° to 90°
- Optional Barn Door accessory available
- LED lifespan: 50,000 hours
- 2-year warranty
- IP20

Product Specifications

Model	CCT	CRI	Beam	LED Lumens	Sys Lumens
TL54SLD18-X-W930	3000K	≥Ra90	Wash	1620lm	1020lm
TL54SLD18-X-W940	4000K	≥Ra90	Wash	1710lm	1080lm

Note: "X" represents different dimming options.

Product Features

- Body Material: Aluminum alloy die-casting
- Driver: Input voltage: 220V~240VAC 50Hz, Electrical box located on the side of the lamp body.
- Dimming: Dimming knob (dimming range: 10% to 100%) or DALI dimming (advance compatibility testing with dimming system required)
- Light source: Using Lumileds LED with a power of 18W at 3000K / 4000K color temperature and a color rendering index of ≥Ra90.
- Finish: Static electricity powder coating Black (BK), White (WT), Platinum (PT)

Optical accessories

TL-530-BD	Four-leaf shutter	
-----------	-------------------	--

Order Model

Model	LED	Dimming	Beam	CRI	CCT	Color
TL54S PALOMA Pro WW	LD18 LED 18W	O On-boa E Non-dimmingrding A DALI	W Wash	9 90	30 3000K 40 4000K	WT White BK Black PT Platinum
TL54S	LD18	O	W	9	30	WT

Example : TL54SLD18-O-W930WT

WAC Lighting
www.wacighting.com (US)
www.wacighting.com.cn (China)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)
14,Lane 299, Bi Sheng Road, Shanghai 201204,China
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

WAC Lighting reserves the right to periodically design and update products.2024-01-29

PALOMA PRO WALL WASHER (WW)

W Track Luminaires

PROJECT :


WAC

TYPE :

Product Image



Line Drawing

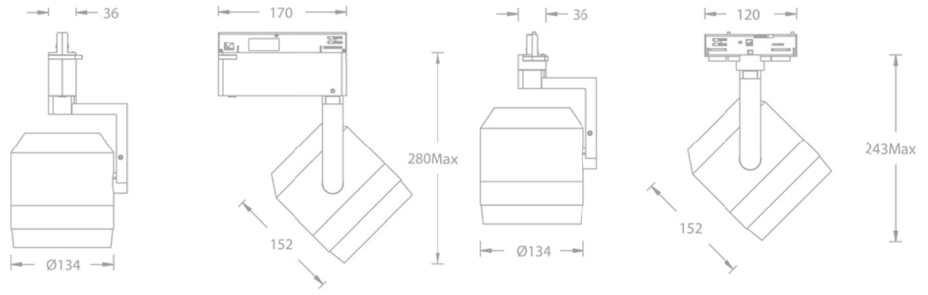

Product Description

TL55SLD24-O/A

TL55SLD24-E

VOLTA series LED round narrow-edge recessed angle downlights have a streamlined appearance and adopt precise lens and black mirror reflector designs to ensure that the light is emitted while still achieving the ultimate anti-glare effect. The light source cavity adopts a sealed design, which can minimize the impact of humid environment on its performance, and the reflector or optical accessories can be freely disassembled and replaced, which greatly improves on-site convenience and is mainly suitable for hotels and commercial indoor places.

Product Advantages

- LED light source, without red/ultraviolet rays
- Two color temperatures available
- Accurate wash wall with light distribution
- Projection in any direction: horizontal adjustment from 0° to 365°; vertical adjustment from -90° to 90°
- Optional Barn Door accessory available
- LED lifespan: 50,000 hours
- 2-year warranty
- IP20

Product Specifications

Model	CCT	CRI	Beam	LED Lumens	Sys Lumens
TL55SLD24-X-W930	3000K	≥Ra90	Wash	2160lm	1360lm
TL55SLD24-X-W940	4000K	≥Ra90	Wash	2280lm	1436lm

Note: "X" represents different dimming options.

Product Features

- Body Material: Aluminum alloy die-casting
- Driver: Input voltage: 220V~240VAC 50Hz, Electrical box located on the side of the lamp body.
- Dimming: Dimming knob (dimming range: 10% to 100%) or DALI dimming (advance compatibility testing with dimming system required)
- Light source: Using Lumileds LED with a power of 24W at 3000K / 4000K color temperature and a color rendering index of ≥Ra90.
- Finish: Static electricity powder coating
Black (BK), White (WT), Platinum (PT)

Optical accessories

TL-23-BD-SW	Four-leaf shutter	
-------------	-------------------	--

Order Model

Model	LED	Dimming	Beam	CRI	CCT	Color
TL55S PALOMA Pro WW	LD24 LED 24W	O On-bo E Non-dimming A DALI	W Wash	9 90	30 3000K 40 4000K	WT White BK Black PT Platinum
TL55S	LD24	O	W	9	30	WT

Example : TL55SLD24-O-W930WT

WAC Lighting
www.waclighting.com (US)
www.waclighting.com.cn (China)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)
14, Lane 299, Bi Sheng Road, Shanghai 201204, China
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

WAC Lighting reserves the right to periodically design and update products. 2024-01-29