

LEDME - MODEL: SLS
 Showcase Luminaires Surface




PROJECT :

TYPE :

Product Image



Line Drawing

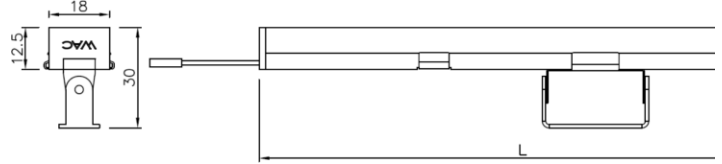

Product Description

The LEDme Showcase series LED surface mounted linear lighting fixtures have a delicate design and are made of stretched aluminum profiles to provide a variety of length and size options. The built-in LED luminous module can be paired with a constant voltage drive and supports multiple dimming methods. Widely applicable to exhibition cabinets in museums and art galleries.

Product Features

- Body Material: Aluminum profile fixture body
- Optical System: Lens
- Finish: Electrostatic powder coating, black (BK)
- Projection direction: /
- Accessories: Angle adjustment accessories
- Certification: CQC
- IP Rating: IP20
- Insulation Level: Class III
- Operating Temperature: -20°C~40°C
- Product weight: About 0.2kg, excluding electrical appliances and packaging

Product Specifications

- LED Type: SMD
- Light power: 10W/m or 20W/m optional
- Source Lm: 3000K:800LM(10W/m)/1480LM(20W/m)
4000K:880LM(10W/m)/1630LM(20W/m)
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 3000K/4000K, Optional Ra90 or Ra97 (>Ra95)
- SDCM: 3 SDCM
- Input: 24VDC, excluding electrical appliances
- Dimming: Depending on external appliances, separate orders are required
- Optional length: 2054mm/1544mm/1031mm
L /521mm/317mm

Order Model

| Model | LED | Length(L) | Driver | Beam | CRI | CCT | Finish |
|-------|----------------------|-----------|--------------------|--------|--------------|----------------------|----------|
| SLS1 | 10 10W/m 20 20W/m | 03 0.317M | T Constant Voltage | W Wash | 9 90 A 97 | 30 3000K 40 4000K | BK Black |
| | | 05 0.521M | | | | | |
| | | 10 1.031M | | | | | |
| | | 15 1.544M | | | | | |
| | | 20 2.054M | | | | | |
| SLS1 | 10 | 20 | T | W | 9 | 30 | BK |

Example : SLS1-1003T-W930BK





LEDME - MODEL: SLS
 Showcase Luminaires Surface




PROJECT :

TYPE :

Accessories

| Part Number | Description | Picture |
|-------------|--|---|
| SLS1-C1-BK | SLS1 Flat card, Need ordered separately |  |
| SLS1-C3-BK | SLS1 Angle adjustment buckle, Standard configuration |  |
| SLS1-LS1-BK | Female terminal + bar cable, Standard configuration |  |
| SLS1-LS2-BK | Male terminal + bar cable, Need ordered separately |  |

Installation diagram and splicing

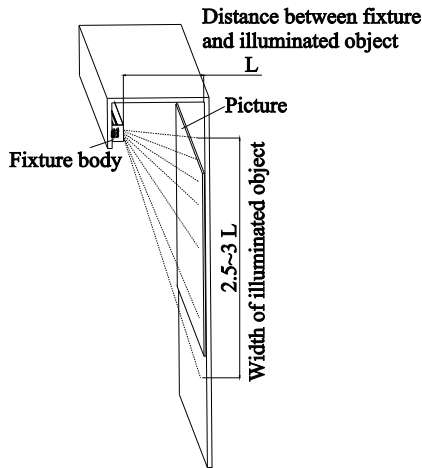

Real scene effect picture

