

ACCENT D3- MODEL: ELD3

Linear Luminaires




PROJECT :

TYPE :

Product Image



Line Drawing

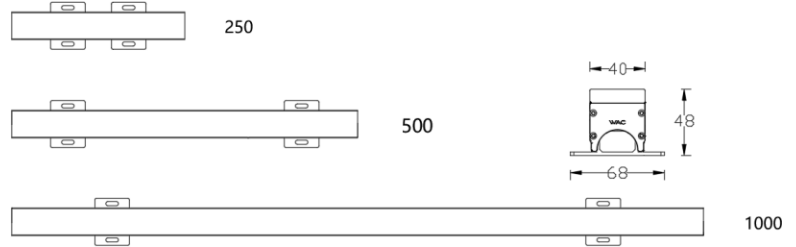

Product Description

Accent D3 lights use a high-efficiency, long-life light source with an equidistant layout design to ensure an even light effect and no shadows. Accent D3 linear luminaires meet the requirements of LEED outdoor lighting power consumption design, and the clean and lightweight exterior design ensures easy assembly to the exterior wall. Accent D3 lights are equipped with flexible cables and outlet from the bottom to meet the needs of the project. Lights support DMX512 dimming control, with automatic addressing function. The whole light has IP66 protection grade, which can be widely used in all kinds of architectural lighting.

Product Features

- Body Material: Aluminum ally lamp body, PC end cap
- Optical System: Three sided PC diffusion hood
- Finish: Static electricity powder coating
- Adjustable Angle: /
- Accessories: Aluminum profile fixing bracket
- Certification: CQC/CE
- IP Rating: IP66
- Insulation Level: Class III
- Operating Temperature: -20°C~50°C

Product Specifications

- LED Power: 20W(Max)/1000mm
- LED Type: SMD
- Source Lm: 2700K 2200LM; 3000K 2300LM; 4000K 2400LM;
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K/ 3000K/4000K/ , Ra80 , RGBW
- SDCM: 3 SDCM(MONO) , 5 SDCM(RGBW)
- Input: 24V DC
- Dimming: ON-OFF/ DMX512
- Net Weight: 1.56Kg without packing

Order Model

Model	Length (mm)	Power (W)	LED s (quantity)	MAX Lumens (lm)	Control System	Beam	Phase Controller (m)	CCT	Finish
ELD303-05	250	5(Max)	18	202	ET ON-OFF 24V DC Power Supply	P Trihedral luminescence	0 W/O Phase	27 2700K	BK Black
ELD305-10	500	10(Max)	36	403				30 3000K	
ELD310-20	1000	20(Max)	72	806				40 4000K	

Model	Length (mm)	Power (W)	LED s (quantity)	MAX Lumens (lm)	Control System	Beam	Phase Controller (m)	CCT	Finish
ELD303-05	250	5(Max)	18	202	MT DMX512 Dimming 24V DC Power Supply	P Trihedral luminescence	1 1 Phase B 12 Phase	27 2700K	BK Black
ELD305-10	500	10(Max)	36	403				30 3000K	
ELD310-20	1000	20(Max)	72	806				40 4000K	

Example : ELD310-20MT-PB30BK

ACCENT D3- MODEL: ELD3

Linear Luminaires



PROJECT :

TYPE :


Model	Length (mm)	Power (W)	LED s (quantity)	MAX Lumens (lm)	Control System	Beam	Phase Controller (m)	CCT	Finish
ELD303-05	250	5(Max)	18	113	MT DMX512 Dimming 24V DC Power Supply	P Trihedral luminescence	1 1 Phase B 12 Phase	F3 RGBW W=3000K	BK Black
ELD305-10	500	10(Max)	36	226				F4 RGBW W=4000K	
ELD310-20	1000	20(Max)	72	451				F6 RGBW W=5700K CC TUNNABLE WHITE	

Example : ELD310-20MT-PBF3BK

Accessories

Item	Description	Pic	Mounting	Quantity Suggested
ELF5-PC-CT002F	ON-OFF Female connector			1 pc per 8m
ELF5-PC-CT002F	ON-OFF Male connector			1 pc per 8m
ELF5-PC-CT002F	DMX512 Dimming Female connector			1 pc per 8m
ELF5-PC-CT002F	DMX512 Dimming Male connector			1 pc per 8m

LIGHT DISTRIBUTION@3000K LUMINAIRE DATA



MODEL : ELD310-20MT-PBF3BK

BEAM ANGLE : 129°

POWER : 21.8W

LUMENS : 451 lm

CBCP : 108cd

EFFICACY : 20.7 lm/W