

FUEGO INDICATOR - MODEL: EIR4NF

In-ground Luminaires

WAC


PROJECT:

TYPE:

Product Image



Line Drawing

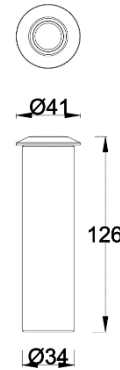

Product Description

The overall stainless steel material of the FUEGO Indicator is precision cast, with a circular appearance and an IP68 protection level, suitable for underwater environments. It has an IK08 impact resistance level and can withstand pressure of 500kg. Installation of embedded cylinder.

Product Features

- Body Material: Overall stainless steel material, PC embedded cylinder
- Optical System: Lens
- Finish: /
- Adjustable Angle: /
- Accessories: /
- Certification: CQC
- IP Rating: IP68
- Insulation Level: Class III
- Operating Temperature: -20°C~50°C

Product Specifications

- LED Type: High Power
- Power: 2W(Max)
- Source Lm: 3000K 260lm;4000K 260lm;Amber;Blue
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 3000K,Ra85 / 4000K,Ra85
- SDCM: 3SDCM
- Input: 9-15V/AC
- Dimming: ON-OFF
- Net Weight: 0.3Kg without packing

Order Model

Model	comment	Power (W)	LEDs (quantity)	Max Lumens (Lm)	Control Systems	Beam	CCT	Finish
EIR4N	F Frame	02 2(Max)	1	80	ET ON-OFF 9-15V/AC Power Supply	5 50°	30 3000K 40 4000K A Amber B Blue	SS Stainless Steel

Example: EIR4NF-02ET-540SS

WAC Lighting

www.waclighting.com (US)
www.waclighting.com.cn (China)

Headquarters

44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)

14,Lane 299, Bi Sheng Road,Shanghai 201204
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

FUEGO INDICATOR - MODEL: EIR4NF

In-ground Luminaires


WAC

PROJECT:

TYPE:

Accessory

LIGHT distribution@3000K IUMINAIRE DATA

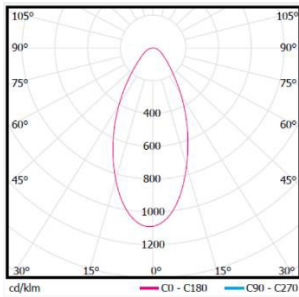

MODEL:	EIR4NF-02ET-530SS
BEAMANGLE:	50°
POWER:	3W (Max)
LUMENS:	80lm
CBCP:	/
EFFICACY:	23 lm/W