

VENTRIX - MODEL: OS2SA
Silo Luminaires(48V)

WAC


PROJECT:

TYPE:

Product Image



Line Drawing

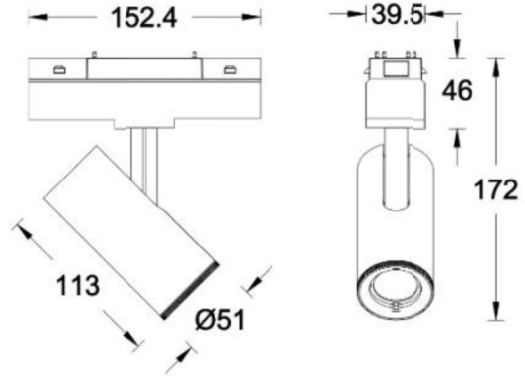

Product Description

The VENTRIX series low-voltage track lighting fixtures are suitable for the WAC VENTRIX track system. The exterior design is exquisite, the lighting fixtures are flexible, compact, and can adjust the illumination angle accurately. The beam angle can also be adjusted. Meeting the needs of different application environments, widely used in lighting spaces such as offices and commercial areas.

Product Features

- Body Material: Aluminum alloy die-casting
- Optical System: Lens
- Finish: Static electricity powder coating
- Adjustable Angle: Horizontal 0-360°, vertical 0-90°
- Accessories/brackets: /
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class III
- Operating Temperature: -20°C~40°C

Product Specifications

- Shielding angle: /
- LED Type: COB
- Light tolerance: 3 SDCM
- Source Lm: See table
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K/3000K/3500K/4000K, Ra90
- Input: 48V
- Dimming: ON-OFF/0-10V/ELV/DMX512/Wireless and APP control
- Net Weight: 0.56Kg without packing

Order Model

Model	Power(W)	Beam	CCT	CRI	Max lumens	Max CBCP	Finish
OS2SA	1 15W	15°-40°	927 2700K	90	810	2870	WT White BK Black
			930 3000K				
			935 3500K				
			940 4000K				

ADJUSTABLE SPOT LIGHT Example: **OS2SA-1-927BK**

Model	Power(W)	Beam	CCT	CRI	Max lumens	Max CBCP	Finish
OS2SA	1 15W	S 15°	927 2700K	90	1230	9400	WT White BK Black
		N 25°	930 3000K				
		F 35°	935 3500K				
			940 4000K				

ADJUSTABLE SPOT LIGHT Example: **OS2SA-1-S927BK**

WAC Lighting
www.waclighting.com (US)
www.waclighting.com.cn (China)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)
14,Lane 299, Bi Sheng Road, Shanghai 201204,China
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

VENTRIX - MODEL: OS2SA

Silo Luminaires(48V)

WAC

PROJECT:

TYPE:

Accessory

Model	Description	Pic
LENS-11-HCM	Honeycomb Louver	
LENS-11P-CRL-WT LENS-11P-CRL-BK	Cross Louver	
LENS-11-SNOOT-BK LENS-11-SNOOT-WT	Snoot	
LENS-11-RED LENS-11-GRN LENS-11-BLU LENS-11-AMB	Colored Lens	
LENS-11-FR	Clear/Frosted Lens	
LENS-11-SPR	Spread Lens	
LENS-11-BEL	Beam Elongating Lens	