

# OCULARC PROJECTOR - MODEL: SL45F

# WAC LIGHTING

## Mini Track Luminaires (24V)

Responsible Lighting®


PROJECT:

TYPE:

**Product Image**



**Line Drawing**

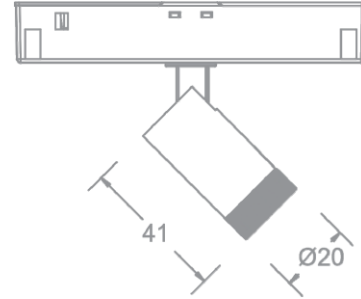

### Product Description

OCULARC Projector series low-voltage projection track lighting fixtures, suitable for WAC mini track systems, with flexible and compact lighting fixtures; Adopting WAC's leading imaging optical technology, logo projection can be achieved in a very small space; It is recommended to use a distance of 0.3m-1.5m, which can be applied to exhibition cabinet spaces in museums and art galleries.

Product Features		Product Specifications	
• Body Material:	Aluminum alloy lamp body, glass optical device	• light source	HP LED
• Optical System:	Multi collimating lens light distribution	• Light source power	2W
• Finish:	Liquid paint, BK	• LED Type:	HP LED
• Adjustable Angle:	Horizontal adjustment from 0 °to 365 °; Vertical 0-90 °adjustment	• Source Lm: 3000K:	190lm; 4000K: 200lm
• Accessories:	As attached	• LED Lifetime:	>50000h-L70 / B10-Ta25°C(LM-80/TM-21)
• Certification:	CQC	• CCT/CRI:	3000K / 4000K; Ra90
• IP Rating:	IP20	• SDCM:	3 SDCM
• Insulation Level:	Class III	• Input:	24V VDC
• Operating Temperature:	-20°C~40°C	• Dimming:	On-off / 0-10V
		• Net Weight:	0.1Kg without packing

### Ordering model

Model	LED	Dimming	Beam	CRI	CCT	Finish
<b>SL45F</b> Ocularc Focus	<b>LD02</b> LED 2W	<b>O</b> On-boarding <b>E</b> ON-OFF®	<b>R</b> Projector	<b>9</b> 90	<b>30</b> 3000K <b>40</b> 4000K	<b>BK</b> Black
SL45F	LD02	O	R	9	30	BK

Example: SL45FLD02-O-R930BK

Note: ① Supports system dimming and requires an external dimmable constant voltage device (dimming method is determined by the constant voltage device)

### Accessory

<b>Mini track</b> MT1M-BK-C 1m MT2M-BK-C 2m MT3M-BK-C 3m		<b>TRACK POWER SUPPLY</b> MLE-BK-C	
<b>I TRACK CONNECTOR</b> MI-BK-C		<b>L TRACK CONNECTOR</b> ML-BK-C	

Attention: The low-voltage track adopts surface installation and comes with two end caps; If hanging installation is required for low-voltage tracks, please contact WAC.

WAC Lighting  
[www.waclighting.com](http://www.waclighting.com) (US)  
[www.waclighting.com.cn](http://www.waclighting.com.cn) (China)

Headquarters  
 44 Harbor Park Drive • Port Washington, NY  
 Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting Technology (Shanghai) Co, Ltd.  
 14, Lane 299, Bi Sheng Road, Shanghai 201204  
 Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

WAC Lighting reserves the right to periodically design and update products. 2024-01-25

# OCULARC PROJECTOR - MODEL: SL45F

Mini Track Luminaires (24V)

# WAC LIGHTING

Responsible Lighting®

PROJECT:

TYPE:

## Lighting effect (real scene shooting)



## Optical Accessories

### LENS-SL45F-GOBO

GOBO piece accessories with WAC text



## System Dimming Wiring Diagram (Lamp Model: SL45FLD02-E)

This circuit lighting fixture can support system dimming. The wiring diagram is as follows (dimming method is determined by constant voltage electrical appliances), and dimming matching testing needs to be done in advance.

